


复合型高分子防水卷材生产线 High Polymer Composite Waterproof Sheet Extrusion Line

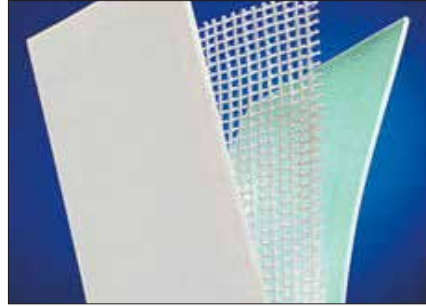

适合多种物料的生产，包括 PVC、TPO、PE 等防水卷材；适合多种产品结构形式厚度 0.5-3mm，宽度 1000-2000mm 的防水卷材，包括：

均质卷材 (代号 H): 不采用内增强材料或背衬材料的防水卷材；
带纤维背衬卷材 (代号 L): 用织物如聚酯无纺布等复合在卷材下表面的防水卷材；
内增强卷材 (代号 P): 用聚酯网格布在卷材中间增强的防水卷材；
内增强卷材 (代号 G): 用玻纤网格布在卷材中间增强的防水卷材。

Used for different kinds of plastic material, such as PVC, TPO, PE etc. Being able to produce below sheets with thickness 0.5-3mm, width 1000-2000mm:

Plastic roll sheet (model: H): without coating with inner reinforced material or outer material ;
Roll sheet with outer fiber (Model: L): coating with fiber or non-woven fabric ;
Inner reinforced roll sheet (Model: P): Inner layer coats with polyester mesh ;
Inner reinforced roll sheet (Model: G): Inner layer coats with glass fiber.



主要技术参数 Main Technical Parameters

机型 Model	SJZ92/188-SJZ80/156	SJP130/36-SJZ92/188	JWS150—JWS120
制品宽度 Products width	1200-2000mm	2000mm	2000mm
制品厚度 Products thickness	0.5-3.0mm	0.5-3.0mm	1-2mm
设计挤出产量 Capacity	800-900kg/h	1200-1300kg/h	1000-1100kg/h

备注：以上规格参数如有变更，恕不另行通知。Note: The specifications are subject to change without prior notice.

